

ZERO FLUSH


General Specification ZeroFlush Vitreous China Urinal (ZF-201)

Urinal will be made of vitreous china, with dimensions of 15.9" W x 24.8" H x 15.5" D, Approx. Weight: 40 Lbs. Product supplied will include ZeroFlush wall hung fixture, one unit integrated wall hanger, fastening hardware, built-in center draining housing receptacle to accept vertical trap Insert made of ABS. Drain Insert, mounting template, drain tube, flange coupler, rubber flange gasket, Installation, maintenance instructions and warranty.

Wall hung urinal with built-in non-removable trap housing with a minimum capacity of 48 liquid ounces.

ABS Drain Insert is to be pushed into place without locking mechanism or tools. Drain Insert is to be push fit with bottom seal created with inserts embedded O-Ring when in place with drain housing. Top of drain insert will have no additional sealing device as it creates an oil seal when liquid Odor Barrier sealant is in place.

Use standard sanitation practices to maintain fixture. ZeroFlush urinal will be able to withstand the periodic pouring of a bucket of water without the loss of sealant liquid. No special cleaning chemicals are required.

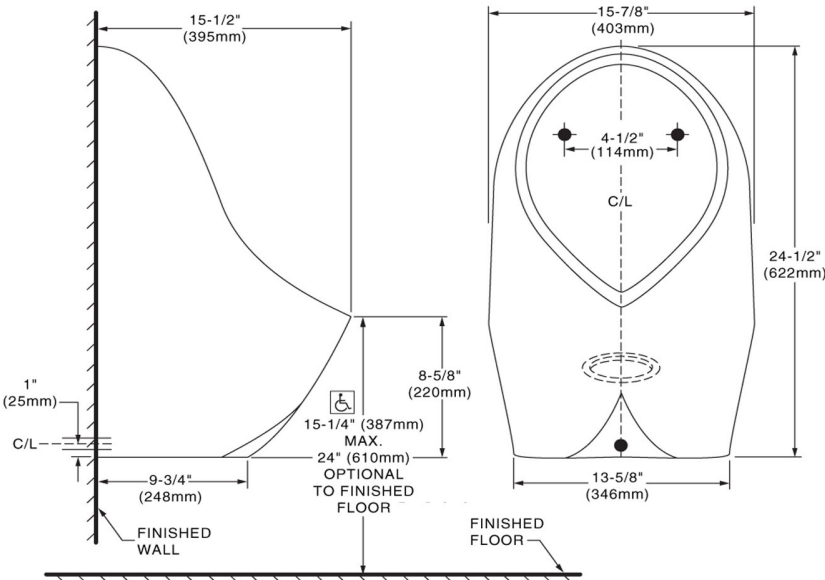

Meets or exceeds ASME A112.19.19 for Vitreous China Urinals

Architectural / Engineering approval



3008-3016 Lions Court
Kissimmee, Florida 34744

ZeroFlush, Inc.

Tel: 407-935-1180
Fax: 407-935-1103